

SOFTWARE

LASER PHOTO PLOTTERS

DIRECT IMAGERS

## SilverWriter 8800-8820-8850 HD



- Resolutions up to 25,400 ppi
- The new Precision Benchmark
- Unique Optical System
- Improved Registration
- Unrivalled 24/7/52 Reliability
- Compatibility & Upgradeability

### Improved Registration

Dynamic beam positioning and Ucamco's patented stress-free film loading system give unrivalled **geometric accuracy** on every plot for perfect image registration.

### Unrivalled 24/7/52 Reliability

The SilverWriter 8000-HD series uses the same advanced film-handling and operational sequencing as the 8000-P models. It delivers market-leading film throughput at all plot resolutions, even for the most complex PCBs. Up to **3 magazines** can hold a total of **450 sheets** of film of 3 different sizes to give maximum plotting flexibility and cost control.

### Compatibility & Upgradeability

The SilverWriter 8000-HD accepts plot instructions directly in Gerber, DPF, ODB++, OI5000 (Expert) or MDA formats. It is a "wheel-in" replacement for conventional plotters. **Choose** from 3 speeds, 12 resolutions (metric and imperial) & up to 3 film magazines. With a well-proven **upgrade path**, we can set up a SilverWriter 8000-HD to your precise requirements.

### The new Precision Benchmark

The SilverWriter 8000-HD series has been developed in response to industry demands for a plotter which delivers ultra-sharp **edge-definition** and very precise **line-width control** but without the very high plot resolutions needed for features down to 4µm. Special high-definition optics and plot resolutions from **6000 ppi** – **25,400 ppi** deliver ultra-precise image quality on features down to **8µm**.

### Unique Optical System

The SilverWriter 8000-HD uses **sub-micron** pixel placement and tightly-focused spot definition to consistently deliver the edge sharpness and line-width tolerances needed for fine-line controlled impedance and microwave technologies - **at any angle** and without the rounding errors found on conventional plots. Back this with precise control of developer chemistry using Ucamco's Intelligent Processor Link for true ultra-precise image definition.

### Get more out of your photo plotter investment with GCS software

Ucamco's Geometric Correction System (GCS) automatically modifies photo tools to compensate for the non-linear and linear distortions introduced into a panel during the manufacturing process. By improving layer registration, GCS delivers increased factory yields and extends the plant capabilities with confidence into higher levels of PCB technology.

For more info please contact your local Ucamco distributor or mail us at [info@ucamco.com](mailto:info@ucamco.com).

#### MARKETS

- Rigid PCB Mfr ✓
- Flex PCB Mfr ✓
- Flex-Rigid PCB Mfr ✓
- HDI PCB Mfr ✓
- PCB Masslam Mfr ✓
- PCB Equipment Mfr
- PCB Traders
- PCB Designers
- PCB Test Centers
- IC Packaging ✓
- Chemical Milling ✓
- High Resolution Graphic Arts ✓
- Flat Panel Display ✓

#### PRODUCT FAMILIES

- CAM
- PreCAM and Engineering
- Electrical Test
- Equipment Front Ends
- Format Converters & RIP's
- OEM Software

- Laser Photo Plotters ✓
- Direct Imagers

# SilverWriter 8800-8820-8850 HD

## Technical Data

Resolutions	Imperial	Metrical	
Imperial	6,000 up to 25,000 ppi + 3000 ppi draft quality		
Metric	4.23 µm up to 1 µm + 8.5 µm draft quality		
Min. line width	0.3 mil	8 µm	
Productivity for an 18" x 24" plot (*)	8800-HD	8820-HD	8850-HD
3000 ppi (in films / hour)	9.2	15.6	23.9
6,000 ppi (in films / hour)	5.1	9.2	15.6
10,000 ppi (in films / hour)	3.2	5.9	10.7
16,000 ppi (in films / hour)	2.0	3.9	7.2
25,000 ppi (in films / hour)	0.9	1.9	3.6
Film Requirements	Imperial	Metrical	
Film format along the drum	18" – 32" in ½" steps	457-813 mm	
Film format around the drum	24-29 in 1" steps"	610-736 mm	
Max. image format along the drum	0.2" (5 mm) less than film format		
Max. image format around the drum	0.9" (23 mm) less than film format		
Sheet tolerance	± 0.02"	± 0.5 mm	
Accuracy	Imperial	Metrical	
Geometric plotter accuracy	< 0.16 mil	< 4 µm	
Geometric plotter repeatability	< 0.08 mil	< 2 µm	
Global positioning accuracy	0.01 mil	0.25 µm	
Geometric accuracy on film	< 0.5 mil	< 12.5 µm	
Geometric repeatability on film	< 0.5 mil	< 12.5 µm	
Line-width accuracy	< 0.08 mil	< 2 µm	
Scaling adjustments	In steps of 0.2 µm		
Scaling adjustment range	± 5%		
Machine Characteristics	Imperial	Metrical	
Loading capacity	Up to 3 magazines. 150 sheets of film in each		
Light source	Red HeNe laser, 632.8 nm, 5 mW		
Dimensions (W x D)	72.8" x 61"	1850 x 1550 mm	
Height	54.3"	1380 mm	
Weight	3300 lbs	1500 kg	
Room temperature during operation	70° F ± 2°	21° C ± 1°	
Relative humidity during operation	50% ± 2%, no condensation		
Relative humidity rate of change	Max 6% per hour		
Electrical Power Supply	2 x 230 VAC, 2,000 VA		
Heat dissipation	2,000 W (1,725 kcal/h)		
Compressed air supply	87 – 145 PSI	6 –10 bar	
Compressed air quality	Free of oil and water		
Compressed air volume	88 ft <sup>3</sup> /hour	2500 l/hour	


(\*) Assuming nominal plotting using factory settings

### SOFTWARE

AutoCAM  
 FaultStation 4  
 FixGenius  
 FlashRip  
 Format Converters  
 Geometric Correction System  
 Integr8tor  
 Mult Job Panelizer  
 OEM Software  
 SmartAOI  
 SmartPlate  
 SmartTest  
 Ucam CAD Review  
 Ucam CAM++  
 Ucam Chemical Milling  
 Ucam ET+  
 Ucam SmartView  
 Ucam uFlex  
 UcamX

For more information on any of our products or services please contact us:


By e-mail: [info@ucamco.com](mailto:info@ucamco.com)  
 On the Web: [www.ucamco.com](http://www.ucamco.com)

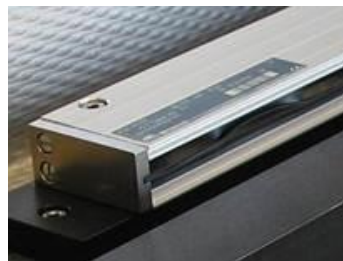

Linear scale



Linear motor

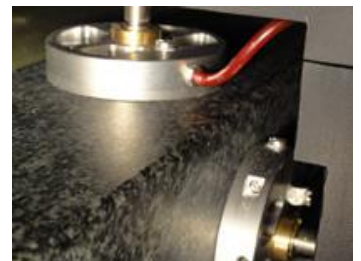

Air bearings

Ucamco NV  
 Bijenstraat 19, 9051 Gent, Belgium  
 Tel: +32 9 216 99 00 - Fax: +32 9 216 99 12  
 E-mail: [info@ucamco.com](mailto:info@ucamco.com) - Web: [www.ucamco.com](http://www.ucamco.com)